

DORMER DRILLS – PREMIUM RANGE

HSS TIN STRAIGHT SHANK JOBBER DRILL



- HSS TIN COATED JOBBER DRILL FOR GENERAL MACHINING APPLICATIONS UP TO X4 DIAMETER
- TITANIUM NITRIDE TIP COATING (2.0MM AND ABOVE NOT ONLY MINIMISES WEAR AND INCREASES TOOL LIFE, BUT ALSO ALLOWS INCREASED PERFORMANCE
- IMPROVED FLUTE GEOMETRY FOR RAPID CHIP EVACUATION
- FEATURES SELF-CENTRING SPLIT-POINT FOR EXCELLENT POSITIONAL ACCURACY AND HOLE QUALITY
- MANUFACTURED TO BS328/DIN338 STANDARDS
- AVAILABLE IN SIZES UP TO 16.0MM

CODE: A002											HSS MEDIUM DRILL TITANIUM NITRIDE COATED DIN338						
DIA (mm)	2.0	2.1	2.4	2.5	3.0	3.1	3.2	3.5	4.0	4.1	4.2	4.3	4.5	5.0	5.1	5.2	5.4
LENGTH	49mm	49mm	57mm	57mm	61mm	65mm	65mm	70mm	75mm	75mm	75mm	80mm	80mm	86mm	86mm	86mm	93mm
PACK:	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
DIA (mm)	5.5	6.0	6.5	7.0	7.2	7.5	8.0	8.2	9.0	9.2	9.5	10.0	11.0	12.0	13.0	15.0	
LENGTH	93mm	93mm	101mm	109mm	109mm	109mm	117mm	117mm	125mm	125mm	125mm	133mm	142mm	151mm	151mm	169mm	
PACK:	10	10	10	10	10	10	10	10	10	10	10	10	5	5	5	EACH	

HSS STRAIGHT SHANK LONG SERIES DRILL



- HSS LONG SERIES DRILL FOR GENERAL MACHINING APPLICATIONS UP TO X6 DIAMETER
- IDEAL FOR DEEPER HOLE DRILLING OR WHERE A SLIGHTLY LONGER REACH IS REQUIRED
- STEAM TEMPERED FINISH FOR IMPROVED
 WEAR RESISTANCE
- MANUFACTURED TO DIN340 STANDARDS

CODE: A110		HSS LONG S											ORILL DIN	340			
DIA (mm)	2.5	3.0	3.2	3.5	4.0	4.2	4.5	4.8	5.0	5.2	5.5	6.0	6.5	7.0	7.2	8.0	10.0
LENGTH	95mm	100mm	106mm	112mm	119mm	119mm	126mm	132mm	132mm	132mm	139mm	139mm	148mm	156mm	156mm	165mm	184mm
PACK:	10	10	10	10	10	10	10	10	10	10	10	10	10	5	5	5	5

HSS STRAIGHT SHANK JOBBER DRILL



- HSS JOBBER DRILL FOR GENERAL MACHINING
 APPLICATIONS UP TO X4 DIAMETER, SILVER RING
 FOR EASY TOOL IDENTIFICATION AND YOUR
 GUARANTEE OF DORMER QUALITY
- 118° POINT ANGLE
- STEAM TEMPERED FINISH FOR IMPROVED
 WEAR RESISTANCE
- MANUFACTURED TO BS328/DIN338 STANDARDS
- AVAILABLE IN SIZES UP TO 20.0MM

CODE: A100			250	HSS M	HSS MEDIUM DRILL STEAM TEMPERED BLACK DIN338				
DIA (mm)	3.0	3.5	3.8	4.0	4.5	5.0	5.5	6.0	
LENGTH	61mm	70mm	75mm	75mm	80mm	86mm	93mm	93mm	
PACK:	10	10	10	10	10	10	10	10	

* ADDITIONAL SIZES AVAILABLE UPON REQUEST *

ROUTER CUTTERS AVAILABLE TO ORDER									
PRODUCT	DESCRIPTION	DIMENSIONS							
	ROUTER CUTTER WITH RELIEF	VARIOUS							
	ROUTER CUTTER WITHOUT RELIEF	VARIOUS							

SCREW DRIVER BITS & A DRIVER BIT HOLDERS										
PRODUCT	DESCRIPTION			LENGTHS	(mm)	PACK QTY				
	H RETAINING RING (1/4")		60			10				
	OLDER GREEN (1/4")		65			1				
	OLDER GREEN, (1/4")			65		1				
DRIVER BIT RANGE										
PH S	LENGTHS (mm)								
		25	49	70	89	102	152			
PH1 (PHILLIPS No1)		•	•			-				
PH2 (PHILLIPS No2) PH3 (PHILLIPS No3)		•	•	•	•	•	•			
		LENGTHS (
PH		25	49	70	89	102	152			
PH2 (PHILLIPS No2) ACR (Ribbed)		•	•	70	07	102	132			
	LENGTHS (mm)								
PH		25	49	70	89	102	152			
PH2 (PHILLIPS No2) ACR (Reduced Head)		•								
0.7		LENGTHS (LENGTHS (mm)							
PZ		25	49	70	89	102	152			
PZ1 (POZI No1)		•	•							
PZ2 (POZI No2)		•	•	•	•	•	•			
PZ3 (POZI No3)		•	•	•	•					
SQUARE DRIVE BIT										
sa		LENGTHS (mm)							
		25	49	70	89	102	152			
SQ1 (SQUARE DRIVE BIT)	•	•								
TORX DRIVE / 6 LOBE DRIVE										
		LENGTHS (LENGTHS (mm)							
T30		25	49	70	89	102	152			
T30 6 LOBE TORX (TO SUIT 9000 SERIES CONCRETE S	•	•	70	3,	132	132				

WERA TOOLS RANGE



- COATED WITH MINUTE DIAMOND PARTICLES
- DRAMATICALLY REDUCED DANGER OF SLIPPING
 SAFER SCREWDRIVING ON SENSITIVE SURFACES
- LESS CONTACT PRESSURE NEEDED FOR DRIVING
- LESS WEAR TO BITS & SCREW
- QUICKER FASTENING TIMES

PRODUCT		PART NUMBER	DESCRIPTION	PACK QTY
PH	~ n	056402	PH2 x 25mm PHILIPS NO.2 DIAMOND COATED DRIVER BIT	10
PH	N N	059532	PH2 x 50mm PHILIPS NO.2 DIAMOND COATED DRIVER BIT	10
PZ	- N	056702	PZ2 X 25mm POZI NO.2 DIAMOND COATED DRIVER BIT	5
		0505775001	PH 2 x 25mm PHILIPS No. 2 bit box, 20 pieces.	20
	PH PZ	05057761001	PZ 2 x 25mm POZI No. 2 bit box, 20 pieces.	20
		889/4/1	K RAPIDADAPTER UNIVERSAL BIT HOLDER 1/4"	5

TEFLON® COATED FABRIC										
PRODUCT	DESCRIPTION	SIZE 1meter x 5meter Roll								
	PREMIUM Silver self-adhesive Teflon 05–115/85	•								
	STANDARD Silver self–adhesive Teflon 04-102/85	•								

PPE & ACCESSORIES	SSORIES THE IMAGES & DESCRIPTIONS BELOW ARE REPRESENTATIVE OF THE VAST ARRAY OF PRODUCTS AVAILABLE FROM WITHIN THIS RANGE. PLEASE CONTACT US FOR QUOTATION ON ANY PRODUCTS NOT SHOWN OR ANY SPECIFIC REQUIREMENTS YOU MAY HAVE.										
PRODUCT	DESCRIPTION	SIZES									
LIGHTWEIGHT POLYURETHANE CO	ATED GLOVE										
	EXCELLENT DEXTERITY & GRIP WITH IMPROVED MECHANICAL PROTECTION. AVAILABLE IN BLACK OR GREY	SMALL	MEDIUM	LARGE	XL						
DISPOSABLE GLOVES											
44	LATEX OR VINYL GLOVES AVAILABLE / POWDERED OR UNPOWDERED	SMALL	MEDIUM	LARGE	XL						
SAFETY GLASSES											
R R	SAFETY GLASSES – ANTI FOG / ANTI SCRATCH Pack quantity will apply										
DUST MASKS											
	VENTED MESH CUP MASKS / FOLD FLAT DUST MASKS (P1 / P2 / P3) PACK QUANTITY WILL APPLY										
KNIVES											
A PARTY OF THE PROPERTY OF THE	DON CARLOS / STANLEY RETRACTABLE KN	IIVES / PACKAGING	CUTTERS								
SHEARS											
	45 degree X-pert Mitre Shears SK2 Utility blade										
MALLET											
	Thor Glazing Mallet 710 1lb (445	5gms) NHM 20032)									



UK FASTENERS ARE AN AUTHORISED DISTRIBUTOR FOR ALL KONIG PRODUCTS AND PROUD TO OFFER FULL SUPPORT FOR YOUR REQUIREMENTS.

UK FASTENERS ARE AN AUTHORISED DISTRIBUTOR FOR ALL KONIG PRODUCTS AND PROUD TO OFFER FULL SUPPORT FOR YOUR REQUIREMENTS.



TOUCH-UP PENS

FULL RANGE OF COLOURS AVAILABLE

A highly pigmented, weather resistant, acrylic based paint touch-up pen, which is ideal for edges and mitre joints. Improved valve technology provides two styles of application.

- Full range of colours available. Get the exact colour you want! Scan the QR code on the next page or give our team the colour details and we will match it for you.
- Bespoke colour match also available. We can have pens made for you, minimum order of only 5 pens!.
- A thinner style pen is also available for use on narrow mitres.
 Please ask us for details
- Spare tips are available to buy separately.





DEDICATED PROFILE: SPRAY PAINT

A CONTROL OF THE PARTY OF THE P

400ml Aerosol spray paint Foil colours, profile whites and lacquers.
Bespoke colours available, minimum order of only 3 aerosol cans.
Scan the OR code below

TOUCH-UP PAINT POTS



A pigmented, weather resistant touch-up lacquer applied by brush. Ideal for base work and laminated surfaces. Can be used as an alternative to colour edging pens when there is a larger area to cover. K0240 Touch up Pots.

REPAIR WAXES

A hard and durable wax filler, designed for repairs to areas subject to severe use. Ideal for repairing edge damage as well as fill holes and scratches of m significant damage.

Applies using the range of battery, gas or electric heating irons.





REPAIR KITS — Window Doctor Kit (K0614)



The "Window Doctor Kit" is designed for window installers and allows them to carry out simple on-site repairs to popular Renolit foils. Every window installer should have one!

Comes complete with:

- K0438620 Battery operated heating iron
- K0161500 Special applicator
- K042210 x2 cotton cloths Size A5
- 4cm Hard wax as below:
 Dark Mahogany (K0141114) Dark Oak (K0141143) Black (K01419005) Golden Oak (K014149601)
 Irish Oak (K014196006) Profile White (K0141) Anthracite Grey (K014178516)

REPAIR KITS — Window Repair Complete Kit (K0670COMP)



The "Complete Window Repair Kit" is designed for window factories and service engineers allowing them to carry out cosmetic repairs reducing the need for expensive and time-consuming remakes.

This kit comes complete with:

- Carry case & foam insert Gas heating iron Mixed window waxes Special applicator
- Special scraper. Felt pad with abrasive lining Cotton cloths Celluose thinners 150ml
- Brass brush. Paint brush Paint pallete. Mixing cups (Pack of 5) Mixed touch up pots
- Polishing paste (Bottle 250ml) Maintenance lacquer 250ml. • Maintenance sponge
- Wet & Dry single sheets (P1200 grit) Aerosol lacquer Extrusion white.

All the items can be bought separately to replace once used.

UPVC Window Customer care Pack



The Konig UPVC window customer care pack is designed to be used by the homeowner to easily and quickly remedy any accidental cosmetic damage such as scuffs or scratches that may occur to the frames during their lifetime. It contains a water based cleaning fluid and a colour matched touch up bottle along with easy to follow instructions that will disguise any unsightly accidental damage.

Available in all popular colours.

Customer own branding is available please ask for details.

HELP & ADVICE



or visit: www.ukfasteners.co.uk/ accessories/Konia

Get perfectly matched Pens, Spray paints and waxes for your profile.

Did you know RAL codes only give you a close match?

For the perfect match scan the QR code and use the Renolite foil codes of your profile.

Help is always on hand!

Please feel free to get in touch for help and advice.

You may also find it useful to know that Konig have made some handy product videos, available to view on YouTube. You can also scan the QR code for easy access to some useful Konig tutorial videos.



Extrusion White water based cleaner (KOUPVCCLEANERWHITE)



The Konig Extrusion White cleaner is a solvent free powerful cleaner that removes dirt and other unwanted residue from extrusion white windows and doors but without damaging the plastic that a solvent based cleaner would. It can be either cloth or sponge applied, simply apply over the entire frame and remove all unwanted residue, then wipe clean with a clean dry cloth. Repeat the process if necessary.

UPVC Composite door cleaner (KOUPVCCLEANER)



The Konig UPVC foil and composite door cleaner is a solvent free powerful cleaner that removes dirt and other unwanted residue from foiled windows and composite doors but without damaging the foil gloss effect that a solvent based cleaner would. It can be either cloth or sponge applied, simply apply over the entire frame and remove all unwanted residue, then wipe clean with a clean dry cloth. Repeat the process if necessary

Universal Maintenance lacquer (K0514)



A multi purpose, quick drying clear lacquer. Suitable for exterior use, providing a water repellent protective coating on PVCU or foiled surfaces. Apply using the maintenance sponge for even application. The heavier the application the higher the sheen level. Available in a 250ml bottle.



PLEASE REQUEST
OUR WINDOW
MASTER
CATALOGUE TO
REVIEW OUR
FULL RANGE

PLEASE REQUEST OUR AluminiumMASTER CATALOGUE

QUALITY FASTENERS FOR ALUMINIUM WINDOWS & DOORS



TAPES & PROTECTIVE FILMS DOUBLE SIDED SECURITY GLAZING TAPE STANDARD SIZES BOX QTY 12mm x 2mm x 40mtr 25 THIS MEDIUM DENSITY FOAM IS COATED BOTH SIDES WITH A MODIFIED ACRYLIC 12mm x 3mm x 25mtr 25 ADHESIVE WHICH CONFORMS TO THE HIGHEST BS STANDARDS FOR SECURITY 12mm x 4mm x 20mtr 25 GLAZING WITHIN THE WINDOW INDUSTRY. 12mm x 5mm x 15mtr 25 COLOURS: BLACK, WHITE 12mm x 6mm x 15mtr 25 ADHESIVE: ACRYLIC 12mm x 8mm x 10mtr 25 CLOTH (DUCT) TAPE STANDARD SIZES BOX QTY 12mm x 50mtr 96 19mm x 50mtr 64 AN EXCELLENT INSTANT GRAB AND WATERPROOF BACKING MAKES THIS AN IDEAL 25mm x 50mtr 48 DUCT TAPE FOR CONTRACTORS THROUGHOUT THE INDUSTRY. 38mm x 50mtr 32 50mm x 50mtr 24 COLOURS: SILVER. BLACK. WHITE. RED. BLUE. YELLOW 75mm x 50mtr 16 ADHESIVE: RUBBER 100mm x 50mtr 12 MASKING TAPE MANY VARIETIES AVAILABLE -**CONTACT US FOR** MORE DETAILS GENERAL PURPOSE MASKING TAPE 60°C LOW BAKE MASKING TAPE 80°C 14 DAY MASKING TAPE 60°C **DOUBLE SIDED TAPE** STANDARD SIZES BOX QTY MEGABOND DOUBLE SIDED TAPE HAS A THICK EXTREME GRAB ADHESIVE COATED 24 25mm x 10mtr ON A UNIFORM SCRIM THAT ENABLES A CLEAN HAND TEAR. THE TAPE IS A POWERFUL BONDING TAPE THAT BONDS VIRTUALLY EVERYTHING TO ANYTHING. 50mm x 10mtr 24 PROTECTION FILMS SINGLE CARPET PROTECTION FILM CLEAR 600mm (W) x 100mtr LOW TACK HARD FLOOR PROTECTION FILM RED 600mm (W) X 100mtr GLASS PROTECTION FILM BLUE SANDING DISCS GRITS PRODUCT DESCRIPTION P100 P120 P150 P180 P220 P240 P320 P400 P500 P600 P800 HERMES VELOUR BACKED 150mm (6") 6 HOLE MEDIUM WEIGHT ALUMINIUM OXIDE 150mm (6") MEDIUM WEIGHT ALUMINIUM OXIDE HERMES ADHESIVE BACKED 150mm (6") 6 HOLE MEDIUM WEIGHT ALUMINIUM OXIDE 150mm (6") MEDIUM WEIGHT ALUMINIUM OXIDE **CUTTING DISCS** DIAMETER (mm) DESCRIPTION 180 230 300 HERMES - FLEX. CLASSIC CUTTING & GRINDING DISCS METAL CUTTING WHEELS FLAT METAL CUTTING WHEELS DEPRESSED METAL GRINDING DISCS DEPRESSED STONE CUTTING WHEELS FLAT STONE CUTTING WHEELS DEPRESSED

SOUDAL FIX & FILL RANGE

SILICONE SEALANT



SILIRUB N - GENERAL PURPOSE LOW MODULUS, NEUTRAL CURE SILICONE SEALANT



SILIRUB LM - HIGH QUALITY, LOW MODULUS, NEUTRAL CURE SILICONE SEALANT

BRILLIANT WHITE / WHITE / CLEAR / TEAK / BROWN / CARAMEL / BLACK

BRILLIANT WHITE / CLEAR / TEAK / BROWN / CARAMEL / BLACK



SILIRUB LMN - SUPERIOR QUALITY. LOW MODULUS NEUTRAL CURE SILICONE SEALANT



SILIRUB COLOR - ANY RAL CLASSIC COLOUR CAN BE PRODUCED. LOW MODULUS. NEUTRAL CURE SILICONE

BRILLIANT WHITE / WHITE / CLEAR / TEAK / BROWN / BLACK /CARAMEL BRONZE / GREY / CHARTWELL / CREAM / ANTHRACITE

ANY RAL CLASSIC COLOUR



HIGH SECURITY

KM SUPERIOR 1 STAR EURO PROFILE CYLINDER

The Yale KM Superior 1 Star Euro Elite Profile Cylinder has been developed to provide resistance against common cylinder attack methods. This cylinder is British Kitemarked TS007:2014 1 Star security and has been tested to the British Standard BS EN1303:2005. Suitable as a replacement product this cylinder is Secured by Design approved and recommended for use on doors that require a high level of security and attack protection.

SPECIFICATIONS:

- TS007: 2014 1 Star British Kitemarked cylinder
- BSI Kitemark approved KM532920
- Secured by Design approved
- 10 year guarantee
- 3 keys supplied

FEATURES:

- Anti-Bump, Anti-Pick, Anti-Screw and Anti-Drill protection
- Available in euro single, euro double and euro turn
- Available in Polished Brass and Nickel Plated finish



MAXIMUM SECURITY

PLATINUM 3 STAR EURO PROFILE CYLINDER

The Yale Platinum 3 Star Cylinder is a TS007:2014 3 star Kitemarked Anti-Snap, Bump, Pick and Pull security product which provides superior strength against known cylinder attack methods. The Platinum 3 Star Cylinder has been independently tested by BSI to be awarded the British Kitemarked TS007:2014 3 star accreditation.

SPECIFICATIONS:

- British Kitemarked TS007:2014 3 star
- Tested to the British Standard BS EN1303:2005
- BSI Kitemark approved KM559658
- Advanced pin tumbler technology
- Superior physical strength
- Secured by Design approved
- 10 year guarantee
- 3 keys supplied

FEATURES:

- Anti-Snap, Anti-Bump, Anti-Pick, Anti-Screw and Anti-Drill protection
- Available in euro single, euro double and euro turn
- Available in Polished Brass and Bright Nickel finish
- Key card identification to easily identify key cutting code
- Flat, horizontal key way with reversible key (doesn't matter which way around you put the key in lock)
- Yale nylon key head for ease of grip and identification









11

CYLINDER FEATURES COMPARISON

DI ATINIIM 3 STAD EIIDU DDUEII E CVI INDED

_ '	LATINOPI 3 STAIL LOIL	O I NOI ILL C	ILINDLIN								
Fe	eatures		Anti-Screw	Anti-Pick	Anti-Drill	Anti-Bump	Anti-Snap Kite- mark Approved	BSI TS007 1 Star KM Approved	BSI TS007 3 Star KM Approved	Secured by Design Approved	Guarantee
HI	GH SECURITY	KM Superior 1 Star	Yes	Yes	Yes	Yes	No	Yes	No	Yes	10 Years
M	AXIUM SECURITY	Platinum 3 Star	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	10 Years

STANDARDS EXPLAINED







TS007 is a standard developed in response to concerns over cylinder attacks. The standard is characterised by a 3 star rating system, and can be achieved by combining a 1 star cylinder with a 2 star security door furniture or using a stand alone 3 star cylinder. The Platinum Series Euro Profile Cylinders are approved to TS007 3 stars and do not require any additional security furniture.

THE ABOVE PRODUCTS ARE A REPRESENTATION OF AN EXTENSIVE RANGE AVAILABLE. PLEASE CONTACT US FOR MORE DETAILS

SOUDAL 400ML CARTRIDGE GUN COX BRAND -

SUITABLE FOR ALL CARTRIDGE APPLIED ADHESIVES,

FILLERS & SEALANTS

10

SOUDAL COMPACT PU

FOAM GUN - PROFESSIONAL

GRADE POLYURETHANE APPLICATOR GUN

FOR USE WITH FOAM GUNS.

SIMON FRAMEVENT HI-FLO & HI-FLO+



NEW

FRAME VENTS



MANUFACTURED IN THE HIGHEST QUALITY UV STABLISED PVCU, THE SIMON FRAMEVENT HF & HF+ HAVE BEEN SPECIFCALLY DESIGNED TO MAKE IT EASY TO ACHIEVE THE REQUIREMENTS OF APPROVED DOCUMENT F-2021 WHILST STILL MAINTAINING THE SMOOTH. ROUNDED. ASTHETIC SYNOMYMOUS OF THE FRAMEVENT RANGE.



FEATURES & OPTIONS

Features:

- A smooth rounded design
- Snap on, quick fit ends
- Positive open & close action
- Integral flyscreen in external hood
- Suitable for PVCu, timber & aluminium windows

Rod control available – for full compliance with Approved Document K 2013

- Can be fitted to give updraught or down-draught
- Dual colours & RAL colours available on request
- Joiner pieces available

Tested in accordance with BS EN 1026:2016 & BS EN 1027:2016 Weather performance



Please scan the QR code for all the latest regulations applicable to ventilation airflow.

Available in:



All the above colours are available as dual on standard white or bright white. 10 year guarantee against colour fade. *Please consult a RAL chart for acurate colour matching.


SIMON FRAMEVENT HI-FLO & HI-FLO+



13

MODEL DETAILS

TWO MODELS ARE AVAILABLE WITHIN THIS HIGH FLOW RANGE



Framevent HF+ Length - 525mm Equivalent area as per BS 13141-1:2019 - 5205m² Box qty. - 50 Slot Size - 2 x (230 x 13mm) + (10mm land)

Fitting Instructions:

- Route out the frame with the correct slot size & configuration for the model to be fitted
- · Place unit centrally over the slots
- · Fix unit in place by using screws provided
- Screw hole centres are 20mm in from each end (40mm off the overall length)


Performance:

- Independently tested to BS EN 13141- 1:2019
- Water tightness of 400pa
- Independently acoustically tested in accordance with BS EN 20140-10:2016, ISO 140-10-2010

Maintenance:

- The Framevent can be cleaned using a damp cloth. The external hood should be brushed lightly to remove dust from the flyscreen area.
- Airflow rates quote are for when fitted in accordance with manufacturer's instructions. We recommend silicone sealing vents for best results*

ROUTING DETAILS

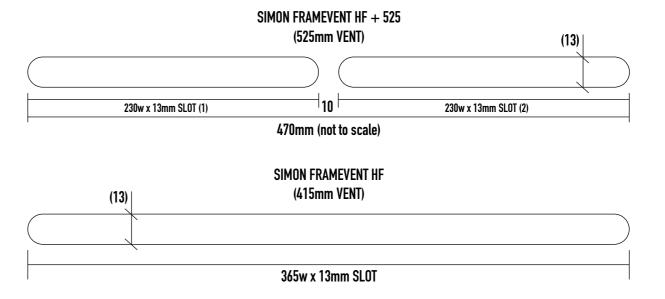

SIMON FRAMEVENT 300 & 400




FRAME VENTS

*FULL RANGE OF COLOURS AVAILABLE

MANUFACTURED IN THE HIGHEST QUALITY UV STABLISED PVCU, THE SIMON FRAMEVENT 300 & 400 HAVE BEEN SPECIFCALLY DESIGNED FOR THE VOLUME MARKET.

DURABLE EASY TO FIT AND FULLY TESTED. IT IS IDEAL FOR BOTH TIMBER & PVCU FRAMES AND ITS SLIM. ELEGANT DESIGN MAKES IT A POPULAR CHOICE.

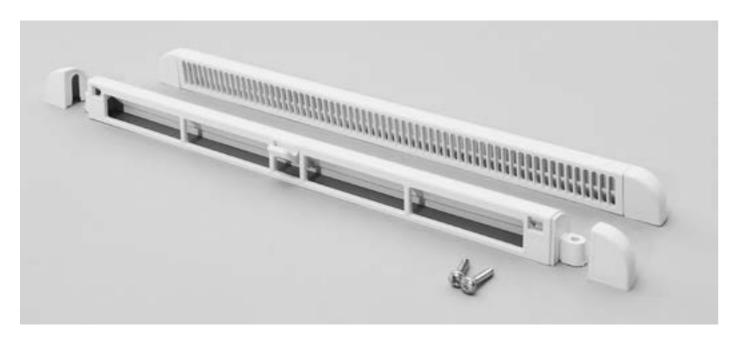

FEATURES & OPTIONS

Features:

- Available in two sizes
- A smooth, rounded design
- Snap on, quick fit ends
- Positive open and close action
- Integral flyscreen in external hood

Ontions.

• Rod control available - for full compliance with Approved Document K 2013

• Can be fitted to give updraught or down-draught

Black Brown (RAL 8022)

• Sleeves available – for full compliance with BS7412: 2007 & BS EN 14351–1:2006

• Joiner pieces available

Tested in accordance with BS EN 1026:2016 & BS EN 1027:2016 Weather performance



Please scan the QR code for all the latest regulations applicable to ventilation airflow.

Available in:

Standard White (RAL 9910)	Bright White (RAL 9016)	Cream (RAL 1015)
Tan (RAL 8003)	Mahogany Rosewood (RAL 8017)	Black (RAL 9005)
Grey (RAL 7016)	Irish Oak (RAL 1011)	Chartwell Green (BS 14 C 35)
Silver Grey (RAL 7001)	Slate Grey (RAL 7015)	Agate Grey (RAL 7038)

Ice Cream White (RAL 9001)

All the above colours are available as dual on standard white or bright white. 10 year guarantee against colour fade.

*Please consult a RAL chart for accurate colour matching.

SIMON FRAMEVENT 300 & 400



15

MODEL DETAILS

TWO MODELS ARE AVAILABLE WITHIN THIS FRAMEVENT RANGE.

Framevent 300 Length – 300mm

Equivalent area as per BS 13141–1:2019 – 2328m²

Box qty. – 50

Slot Size – 260 x 13mm

Framevent 400 Length – 400mm

vent 400 Length – 400mm Equivalent area as per BS 13141–1:2019 – 3180m² Box qty. – 50 Slot Size – 365 x 13mm

Performance:

- Independently tested to BS EN 13141- 1:2019
- Water tightness of 400pa
- Independently acoustically tested in accordance with BS EN 20140-10:1992, ISO 140-10-1991
- Airflow rates quote are for when fitted in accordance with manufacturer's instructions.
 We recommend silicone sealing vents for best results*

ROUTING DETAILS

